


BR1 Mini 5G

Affordable, Long-lasting 5G
for Mass Deployments



4G connectivity might work fine today,
but the switch to 5G is inevitable.
Futureproof your network with the latest
5G technology, and keep your network
running for **many years to come**.

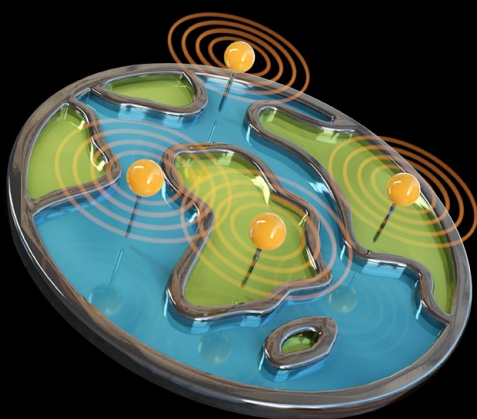

A single SKU for global deployments

Extensive list of compatible 5G/LTE bands.
Native **5G NSA** and **SA mode** support.

Private 5G Support


Adding devices to your Private 5G network
is no longer a hassle. Integration can be as
simple as **plug and play**.

NSA ↙


SA !

Private 5G (P)

► 5G Adapter

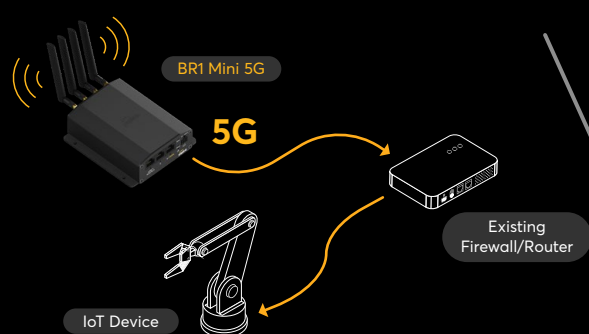

► Gateway/Router

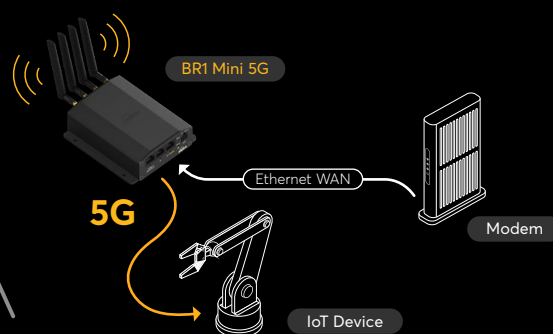

Have an existing network? Add the **BR1 Mini 5G** as a **5G adapter** with zero hassle. Need something more? The device can also act as a **gateway/router** for multiple WANs.

Stay in touch with **InTouch**

Access connected devices, like sensors and cameras, with **out of band management** at 5G speeds.



Monitor your entire network from a single screen

Remotely access your Peplink devices' web admin with **InControl2**, our cloud-based endpoint management system. Generate reports and push configurations for more **effective management**.

► Key **BR1 Mini 5G** Benefit

An exceptionally reliable, rugged 5G Cellular Router that connects your data and Internet applications - wherever they are.

#1 **Future-proof Connectivity**

With the latest cellular LTE and 5G via **SIM** or **eSIM** and a second optional **Ethernet WAN**, the BR1 Mini 5G connects your Ethernet devices with up to 300Mbps throughput.



#2 **Ruggedized and Reliable**

Built in a **rugged & reliable metal case** with **fanless, ventless design** certified for shock and vibration resistance for deployment virtually anywhere.



#3 **Designed for Remote Operation**

With central management via Peplink **InControl2** and local device management via Peplink **InTouch**, the BR1 Mini saves time and reduces field visits.



► **Use Cases**



POS




IoT, Kiosk, Remote Surveillance



Mobility



Remote Work

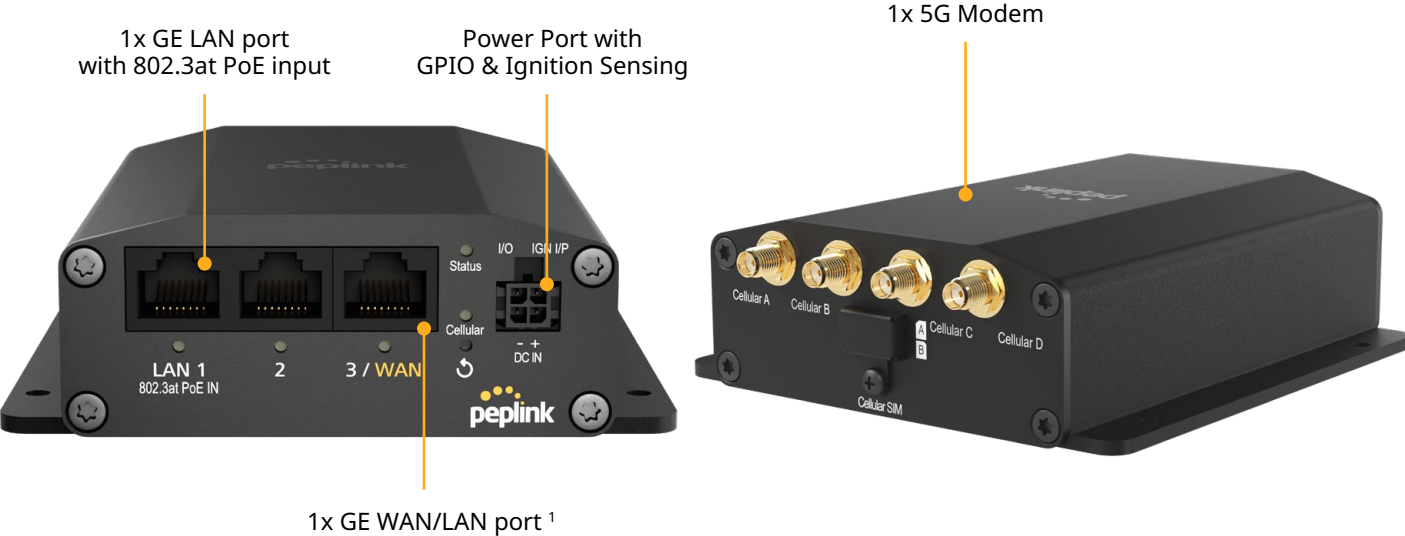

Specifications

WAN Interface	1x 10/100/1000M Ethernet ¹ 1x Embedded Cellular Modem with Redundant SIM Slots	Antenna Connectors	4x SMA Cellular Antenna Connectors
LAN Interface	2x 10/100/1000M Ethernet	Power Input	Power Port: 10V – 30V DC AC Adapter: AC Input 100V–240V / DC Output 12V Power over Ethernet 802.3at
SpeedFusion features	Hot Failover ¹ / Smoothing ¹ / Bandwidth Bonding ¹	Power Consumption	11W (nominal) , 13W (max.)
Number of SpeedFusion VPN Peers	2 / 5 ¹	Dimension	5.0 x 4.2 x 1.4 inches / 125.7 x 107 x 35 mm
Router Throughput	300 Mbps	Weight	0.93 pounds / 420 grams
SpeedFusion VPN Throughput - No Encryption - 256-bit AES	80 Mbps 20 Mbps / 60Mbps ¹	Operating Temperature	-40° – 149°F / -40° – 65°C
Recommended Users	1-60	Humidity	15% – 95% (non-condensing)
Cellular Data Rate ² (Downlink/Uplink)	5G: 3.4 Gbps / 900 Mbps CAT-20: 1.6 Gbps / 200 Mbps	Certification	FCC, CE, RoHS EN 61000 Electromagnetic Compatibility EN 45545-2 Railway applications - Fire protection ³
		Package Content	1x BR1 Mini 5G 4x LTE/5G Antennas (ACW-235) 1x 12V 2A 4pin Power Supply (ACW-632)
		SIM Options	Nano-SIM (4FF) Peplink eSIM BYO eSIM (2 profiles)
		Warranty	1-Year Limited Warranty

¹ Require a PrimeCare subscription or a feature pack add-on license (MAX-BR1-MINI-LC-FP).
² Maximum theoretical data rate.
³ Certification Pending.

Specifications are subject to change without notice.

Ordering Information

Product Code	Regions^	5G Bands	LTE Bands
MAX-BR1-MINI-5GN-T-M-PRM Embedded Modem(s): 1x 5G	Global* *US Carrier Certifications: AT&T, T-Mobile, Verizon (C-Band), FirstNet	5G (NSA & SA) Sub 6Ghz: n1, n2, n3, n5, n7, n8, n12, n13, n14, n18, n20, n25, n26, n28, n29, n30, n38, n40, n41, n48, n66, n70, n71, n75, n76, n77, n78, n79	B1, B2, B3, B4, B5, B7, B8, B12, B13, B14, B17, B18, B19, B20, B25, B26, B28, B29, B30, B32, B34, B38, B39, B40, B41, B42, B43, B46, B48, B66, B71

^ Regions are for reference only. For specific location compatibility, please refer to the bands.

Featured Add-on

Product Code	Description
PRM-A-1Y / PCP-A-1Y	PrimeCare A / PrimeCare+ A (1-Year)
PRM-A-2Y / PCP-A-2Y	PrimeCare A / PrimeCare+ A (2-Year)
PRM-A-4Y / PCP-A-4Y	PrimeCare A / PrimeCare+ A (4-Year)
MAX-BR1-MINI-LC-FP	Feature pack for BR1 Mini enables Ethernet WAN, Hot Failover, Smoothing, Bandwidth Bonding
MAX-BR1-MINI-BD-FP-2Y	MAX BR1 Mini Bundle Offer - 2 year PrimeCare+ extension & complimentary feature pack
MAX-BR1-MINI-BD-FP-4Y	MAX BR1 Mini Bundle Offer - 4 year PrimeCare extension & complimentary feature pack
MAX-BR1-MINI-BD-FP-PLUS-2Y	MAX BR1 Mini Bundle Offer - 2 year PrimeCare+ extension & complimentary feature pack
MAX-BR1-MINI-BD-FP-PLUS-4Y	MAX BR1 Mini Bundle Offer - 4 year PrimeCare+ extension & complimentary feature pack
ACW-634	10ft DC Power Cable
ACW-DIN-BR1-MINI	DIN Rail mount kit
ANT-SLM-40G-S-B-6	Slim 40G - 4x4 MIMO 5G Ready Cellular Antenna System with GPS (Black)
ANT-MB-40G-S-W-6	Mobility 40G - 4x4 MIMO 5G Ready Cellular Antenna System with GPS (White)
ANT-MB-40G-S-B-6	Mobility 40G - 4x4 MIMO 5G Ready Cellular Antenna System with GPS (Black)

Deep Dive

Software	Pepwave MAX Firmware	Advanced QoS	Individual Bandwidth Limit Application Prioritization • SIP, HTTPS, VPN QoS • Custom Application QoS
WAN	Support for PPPoE, Static IP, DHCP WAN Link Health Check Bandwidth Allowance Monitor Support for Dynamic DNS services WAN Port Convertible into LAN Port	Networking	NAT and IP Forwarding Static Routes Port Forwarding Many to One, One to One NAT NAT Pool SIP ALG, H.323 ALG UPnP, NAT-PMP
LAN	DHCP Server for LAN Clients Extended DHCP Option DHCP Reservation DNS Proxy for LAN Clients VLAN on LAN Support	Captive Portal Support	Support for Wired LAN clients Support RADIUS Authentication Time and Usage Quotas on Open Access Mode Built-in Customizable Splash Page
Security	Stateful Firewall DoS Prevention Web Blocking	Device Management	Web Administrative Interface Command Line Interface InControl Cloud Management Email Notification Active Client & Session Lists Bandwidth Usage Statistics Syslog Service SNMP v1, v2c and v3
Complete VPN Solution	SpeedFusion VPN • Site-to-Site VPN • Hot Failover • 256-bit AES Encryption • Pre-shared Key Authentication IPsec VPN (Network-to-Network)^		

^ IPsec VPN supports connection with Cisco, Juniper, Peplink, or Pepwave devices